




SRD Shrink Fit (DIN Standard)

Shrinkage method sets a cutting tool firmly by heating and cooling the chuck. High precision, rigidity and strong chucking. (DIN Type)

**Max RPM
40,000**

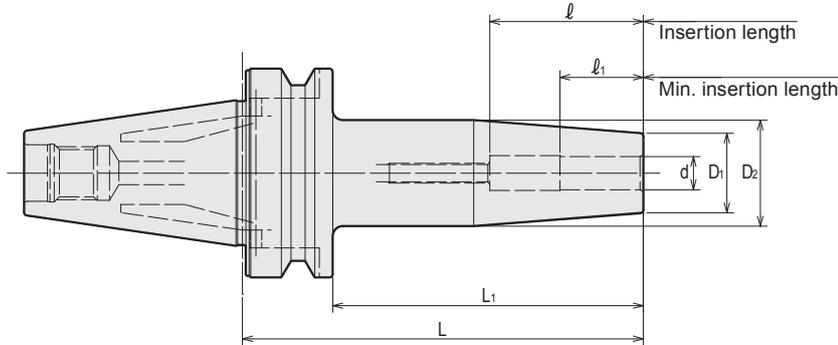

Pull studs for BT shank can be used as is for AHOA shank.
Pull stud with coolant pipe for old AHO shank can be used by removing the coolant pipe.

Unit : Metric

Code	Model	d	L	L1	D	D1	l1	l
3350 41106080	WBT-AHO30A -SRD6A -80	6	80	58	21	27	26	26 ~ 36
3350 41106105		-105	6	105	83	21	27	26 ~ 36
3350 41106120		-120	6	120	98	21	27	26 ~ 36
3350 41108080	-SRD8A -80	8	80	58	21	27	26	26 ~ 36
3350 41108105		-105	8	105	83	21	27	26 ~ 50
3350 41108120		-120	8	120	98	21	27	26 ~ 50
3350 41110080	-SRD10A -80	10	80	58	24	32	32	32 ~ 42
3350 41110105		-105	10	105	83	24	32	32 ~ 50
3350 41110120		-120	10	120	98	24	32	32 ~ 50
3350 41112090	-SRD12A -90	12	90	68	24	32	37	37 ~ 47
3350 41112105		-105	12	105	83	24	32	37 ~ 60
3350 41112120		-120	12	120	98	24	32	37 ~ 70
3350 41114090	-SRD14A -90	14	90	68	27	34	37	37 ~ 47
3350 41114105		-105	14	105	83	27	34	37 ~ 60
3350 41114120		-120	14	120	98	27	34	37 ~ 70
3350 41116090	-SRD16A -90	16	90	68	27	34	40	40 ~ 50
3350 41116105		-105	16	105	83	27	34	40 ~ 60
3350 41116120		-120	16	120	98	27	34	40 ~ 70
3350 41306090	WBT-AHO40A -SRD6A -90	6	90	63	21	27	26	26 ~ 36
3350 41306120		-120	6	120	93	21	27	26 ~ 36
3350 41306160		-160	6	160	133	21	27	26 ~ 36
3350 41308090	-SRD8A -90	8	90	63	21	27	26	26 ~ 50
3350 41308120		-120	8	120	93	21	27	26 ~ 50
3350 41308160		-160	8	160	133	21	27	26 ~ 50
3350 41310090	-SRD10A -90	10	90	63	24	32	32	32 ~ 50
3350 41310120		-120	10	120	93	24	32	32 ~ 50
3350 41310160		-160	10	160	133	24	32	32 ~ 50
3350 41312090	-SRD12A -90	12	90	63	24	32	37	37 ~ 55
3350 41312120		-120	12	120	93	24	32	37 ~ 70
3350 41312160		-160	12	160	133	24	32	37 ~ 70
3350 41314090	-SRD14A -90	14	90	63	27	34	37	37 ~ 60
3350 41314120		-120	14	120	93	27	34	37 ~ 70
3350 41314160		-160	14	160	133	27	34	37 ~ 70
3350 41316090	-SRD16A -90	16	90	63	27	34	40	40 ~ 60
3350 41316120		-120	16	120	93	27	34	40 ~ 70
3350 41316160		-160	16	160	133	27	34	40 ~ 80
3350 41318105	-SRD18A -105	18	105	78	33	42	40	40 ~ 60
3350 41318120		-120	18	120	93	33	42	40 ~ 70
3350 41318160		-160	18	160	133	33	42	40 ~ 80
3350 41320105	-SRD20A -105	20	105	78	33	42	42	42 ~ 60
3350 41320120		-120	20	120	93	33	42	42 ~ 70
3350 41320160		-160	20	160	133	33	42	42 ~ 100
3350 41325105	-SRD25A -105	25	105	78	44	53	48	48 ~ 60
3350 41325120		-120	25	120	93	44	53	48 ~ 70
3350 41325160		-160	25	160	133	44	53	48 ~ 105
3350 41332105	-SRD32A -105	32	105	78	44	53	52	52 ~ 60
3350 41332120		-120	32	120	93	44	53	52 ~ 70
3350 41332160		-160	32	160	133	44	53	52 ~ 105
3350 41506100	WBT-AHO50A -SRD6A -100	6	100	62	21	27	26	26 ~ 36
3350 41506120		-120	6	120	82	21	27	26 ~ 36
3350 41506160		-160	6	160	122	21	27	26 ~ 36
3350 41508100	-SRD8A -100	8	100	62	21	27	26	26 ~ 50
3350 41508120		-120	8	120	82	21	27	26 ~ 50

Code	Model	d	L	L1	D	D1	ℓ1	ℓ
3350 41508160	-160	8	160	122	21	27	26	26 ~ 50
3350 41510100	-SRD10A -100	10	100	62	24	32	32	32 ~ 50
3350 41510120	-120	10	120	82	24	32	32	32 ~ 50
3350 41510160	-160	10	160	122	24	32	32	32 ~ 50
3350 41512100	-SRD12A -100	12	100	62	24	32	37	37 ~ 55
3350 41512120	-120	12	120	82	24	32	37	37 ~ 70
3350 41512160	-160	12	160	122	24	32	37	37 ~ 70
3350 41514100	-SRD14A -100	14	100	62	27	34	37	37 ~ 60
3350 41514120	-120	14	120	82	27	34	37	37 ~ 70
3350 41514160	-160	14	160	122	27	34	37	37 ~ 70
3350 41516105	-SRD16A -105	16	105	67	27	34	40	40 ~ 60
3350 41516120	-120	16	120	82	27	34	40	40 ~ 70
3350 41516160	-160	16	160	122	27	34	40	40 ~ 80
3350 41518105	-SRD18A -105	18	105	67	33	42	40	40 ~ 60
3350 41518120	-120	18	120	82	33	42	40	40 ~ 70
3350 41518160	-160	18	160	122	33	42	40	40 ~ 80
3350 41520105	-SRD20A -105	20	105	67	33	42	42	42 ~ 60
3350 41520120	-120	20	120	82	33	42	42	42 ~ 70
3350 41520160	-160	20	160	122	33	42	42	42 ~ 100
3350 41525110	-SRD25A -110	25	110	72	44	53	48	48 ~ 65
3350 41525135	-135	25	135	97	44	53	48	48 ~ 85
3350 41525160	-160	25	160	122	44	53	48	48 ~ 110
3350 41532110	-SRD32A -110	32	110	72	44	53	52	52 ~ 65
3350 41532135	-135	32	135	97	44	53	52	52 ~ 85
3350 41532160	-160	32	160	122	44	53	52	52 ~ 110

1. Always use carbide shank tools with h6 tolerance.

2. For ID size $\varnothing 3.0 \sim \varnothing 5.0 \text{ mm}$, please contact NT TOOL.

Ordering Example

WBT-AHO40A - SRD10A - 105

AHO Shank size

I.D.

Projection length