




ERZ

"R"Zero Holder For Small Diameters

Holder with runout adjustment mechanism. Suitable for drilling in tight space.

Max RPM
20,000

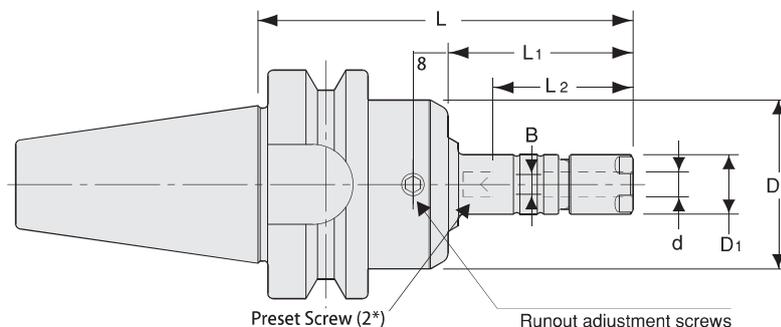

Unit : Metric

Code	Model	d	L	L1	B	L2	D1	D2	kg	Nut	Collet	Spanner	Wrench
3130 00108060	BT30 -ERZ8 -60	0.5 ~ 5.0	60	22	— (0 ~ 3.1)	33 (19 ~ 29)	12	34	0.5	ERP-8	ER8	S-8E	L-3T
3130 00108075	-75	0.5 ~ 5.0	75	37	— (0 ~ 3.1)	33 (19 ~ 29)	12	34	0.5				
3130 00108090	-90	0.5 ~ 5.0	90	52	— (0 ~ 3.1)	33 (19 ~ 29)	12	34	0.5				
3130 00108105	-105	0.5 ~ 5.0	105	67	— (0 ~ 3.1)	33 (19 ~ 29)	12	34	0.6				
3130 00110060	-ERZ11S -60	0.5 ~ 7.0	60	22	0 ~ 4	22 ~ 42	16	34	0.5	ERP-11S	FDC-07	S-11E	L-3T
3130 00110075	-75	0.5 ~ 7.0	75	37	0 ~ 4	22 ~ 42	16	34	0.5				
3130 00110090	-90	0.5 ~ 7.0	90	52	0 ~ 4	22 ~ 42	16	34	0.6				
3130 00110105	-105	0.5 ~ 7.0	105	67	0 ~ 4	22 ~ 42	16	34	0.6				
3130 00308075	BT40 -ERZ8 -75	0.5 ~ 5.0	75	32	— (0 ~ 3.1)	33 (19 ~ 29)	12	34	1.1	ERP-8	ER8	S-8E	L-3T
3130 00308090	-90	0.5 ~ 5.0	90	47	— (0 ~ 3.1)	33 (19 ~ 29)	12	34	1.1				
3130 00308105	-105	0.5 ~ 5.0	105	62	— (0 ~ 3.1)	33 (19 ~ 29)	12	34	1.1				
3130 00308135	-135	0.5 ~ 5.0	135	92	— (0 ~ 3.1)	33 (19 ~ 29)	12	34	1.1				
3130 00310075	-ERZ11S -75	0.5 ~ 7.0	75	32	0 ~ 4	22 ~ 42	16	34	1.1	ERP-11S	FDC-07	S-11E	L-3T
3130 00310090	-90	0.5 ~ 7.0	90	47	0 ~ 4	22 ~ 42	16	34	1.1				
3130 00310105	-105	0.5 ~ 7.0	105	62	0 ~ 4	22 ~ 42	16	34	1.1				
3130 00310135	-135	0.5 ~ 7.0	135	92	0 ~ 4	22 ~ 42	16	34	1.2				

1. Collet ,spanner, and adjustment wrench are sold separately.
- 2*. ES8, a preset screw for ERZ8, is sold separately.
ERZ11S includes a standard preset screw HDS-07A-ES11.
3. " B " and " L2 " dimensions in brackets are for using ES8 preset screw.
4. Refer to ACC 13 for minimum tool insertion length in case of using our coolant collets.
5. See ACC 14 for standard tightening torque.

Ordering Example

BT40 - ERZ8 - 105

Shank size

Projection length

FDC Collet	ER Collet	Spanner	Preset screw	Adjustment wrench
ACC 02-03	ACC 06	ACC 14	ACC 15	R-Ø 06