
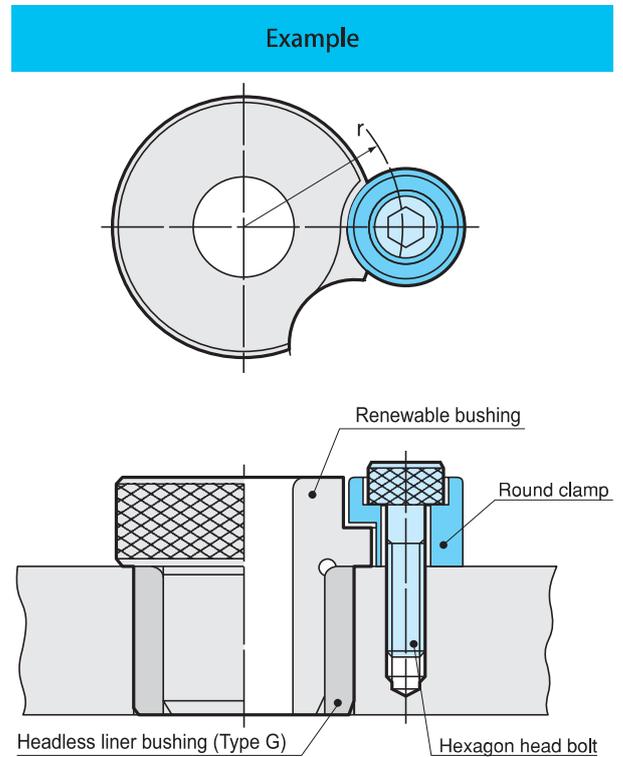


Round Clamp Type R

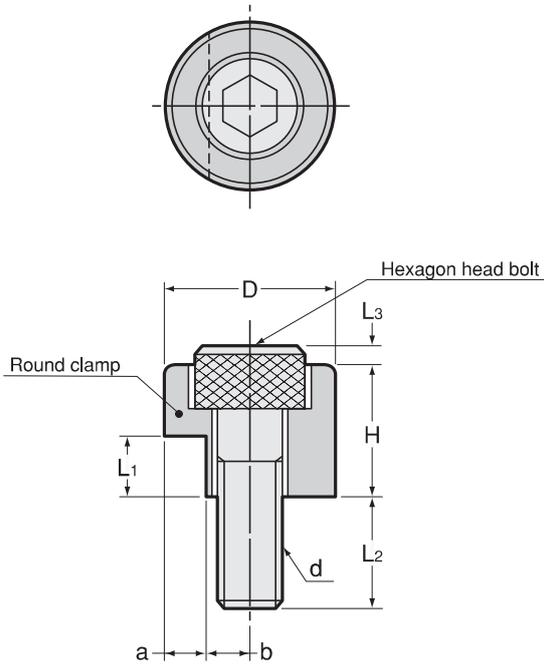

Application

Round clamp can be used in following cases.

1. Heavier round load is put on renewable bushing.
2. Round clamp can be used to prevent rotating of renewable bushing (Type D, E and F)

Model	d		D	a	b	H	L1	L2	L3	Hexagon headed bolt	Size of hexagon wrench
	Size	Pitch									
R-5	5	0.8	12.3 ±0.05	3 ⁰ _{-0.1}	3.15	8	4	9	3	M5 × 15	4
R-6	6	1	15.5 ±0.05	4 ⁰ _{-0.1}	3.75	12	5.5	8	2	M6 × 16	5
R-8	8	1.25	19.5 ±0.05	5 ⁰ _{-0.1}	4.75	15	6.5	10.5	2.5	M8 × 20	6

Hexagon headed bolt is included in round clamp.

Position and dimension of lock screw internal thread

Round clamp has the same position and dimension as those of T type lock screw.

Code

R-5 : 0007 00000005
 R-6 : 0007 00000006
 R-8 : 0007 00000008