

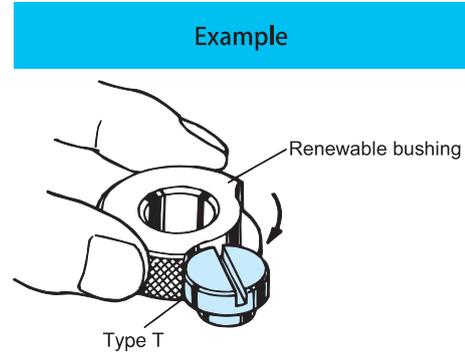


Lock Screw Type T

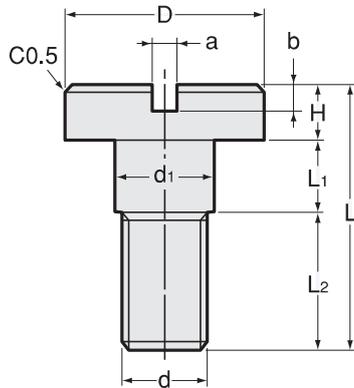

Model	d		d1	D	a	b	H	L1	L2	L
	Size	Pitch								
T-5	5	0.8 (0.9)	6 ±0.2	12 ±0.2	1.6	1.5	3	4 ±0.1	9	16
T-6	6	1	7 ±0.2	15 ±0.2	1.6	2	4	5.5 ±0.2	10.5	20
T-8	8	1.25	9 ±0.2	18 ±0.3	2	2.5	5	6.5 ±0.2	12.5	24

Position and dimension of lock screw internal thread

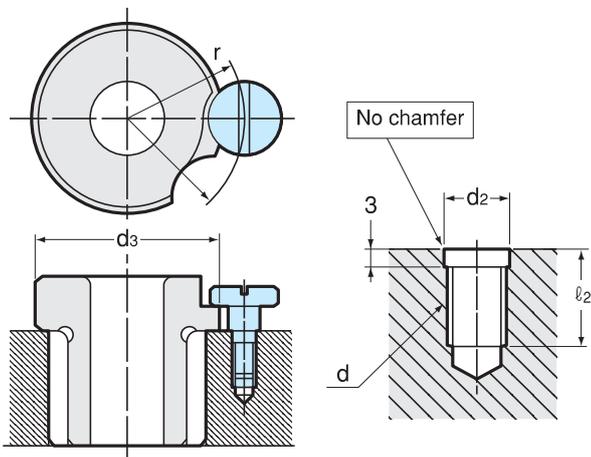

d3	d	r		d2	l2
		Std size	Tolerance		
16	5	12	±0.2	5.2	11
19	5	13.5	±0.2	5.2	11
22	5	15	±0.2	5.2	11
26	5	17	±0.3	5.2	11
30	5	19	±0.3	5.2	11
35	6	22	±0.3	6.2	14
40	6	24.5	±0.3	6.2	14
47	6	28	±0.3	6.2	14
55	8	33	±0.3	8.2	16
62	8	36.5	±0.3	8.2	16
69	8	40	±0.3	8.2	16
77	8	44	±0.3	8.2	16

Ordering Example

T - 5(0.9)
d Pitch

Code

T-5 (0.8) : 0003 00000508
 T-5 (0.9) : 0003 00000509
 T-6 : 0003 00000600
 T-8 : 0003 00000800

T-5 is available in P = 0.8 (ISO) and P = 0.9 (JIS). When ordering, please specify P (pitch) 0.8 or 0.9.