





FMC.A Face Mill Arbor

For SANDVIK T-MAX shoulder face mill.

Type1

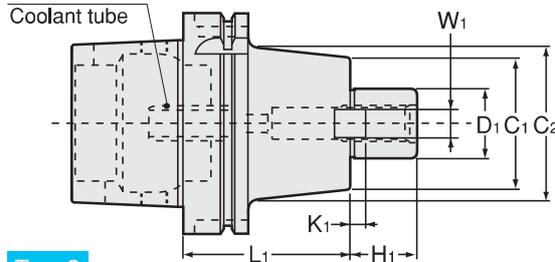

Type2

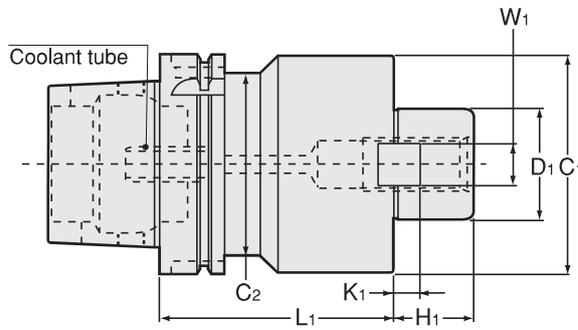

● Coolant tube is included

Unit : Metric

Code	Model	Type	D1	L1	H1	C1	C2	W1	K1	kg	Clamp Bolt	Hex	Cutter Dia. example
535013222045	HSK40A -FMC22A -45	2	22	45	18	45	31	10	5	0.5	MBA-M10-30 P=1.5	8	50 63
535013225060	-FMC25.4A -60	2	25.4	60	20	70	34	9.5	5		MBA-M12-35 P=1.75	10	80
535014222060	HSK50A -FMC22A -60	2	22	60	18	45	42	10	5	0.8	MBA-M10-30 P=1.5	8	50 63
535014225060	-FMC25.4A -60	2	25.4	60	20	70	42	9.5	5	1.2	MBA-M12-35 P=1.75	10	80
535015222060	HSK63A -FMC22A -60 -H	1	22	60	18	45	45	10	5	1.1	MBA-M10-30 P=1.5	8	50 63
535015225060	-FMC25.4A -60 -H	2	25.4	60	20	70	53	9.5	5	1.5	MBA-M12-35 P=1.75	10	80
535015227060	-FMC27A -60 -H	2	27	60	20	75	53	12	6	1.5	MBA-M12-35 P=1.75	10	80
535015238060	-FMC38.1A -60 -H	2	38.1	60	22	85	48	15.9	7	1.9	MBA-M16-35 P=2.0	14	100
535017222090	HSK100A -FMC22A -90 -H	1	22	90	18	45	85	10	5	3.7	MBA-M10-30 P=1.5	8	50 63
535017225090	-FMC25.4A -90 -H	1	25.4	90	20	70	85	9.5	5	4.3	MBA-M12-35 P=1.75	10	80
535017227090	-FMC27A -90 -H	1	27	90	20	70	85	12	6	4.4	MBA-M12-35 P=1.75	10	80
535017238105	-FMC38.1A -105 -H	1	38.1	105	22	85	85	15.9	7		MBA-M16-35 P=2.0	14	100

HSK63A, HSK100A have manual clamp holes in the shank.

Clamp bolt is included.

Ordering Example

Without manual clamping hole (HSK40A, HSK50A)

HSK50A - FMC25.4A - 60

Shank size

D1

Projection length

Ordering Example

With manual clamping hole (HSK63A, HSK100A)

HSK63A - FMC25.4A - 60 - H

Shank size

D1

Projection length

With manual clamping hole